Estimates for the work of providing and laying of 300mm dia RCC NP-3 class sewer pipeline from 1st cross Rajiv Ngar to 1st D cross Kasturinagar near Goplan Apartment via 1st main Kasturi nagar coming under OMBR s/s of AEE E2-2 subdivision.

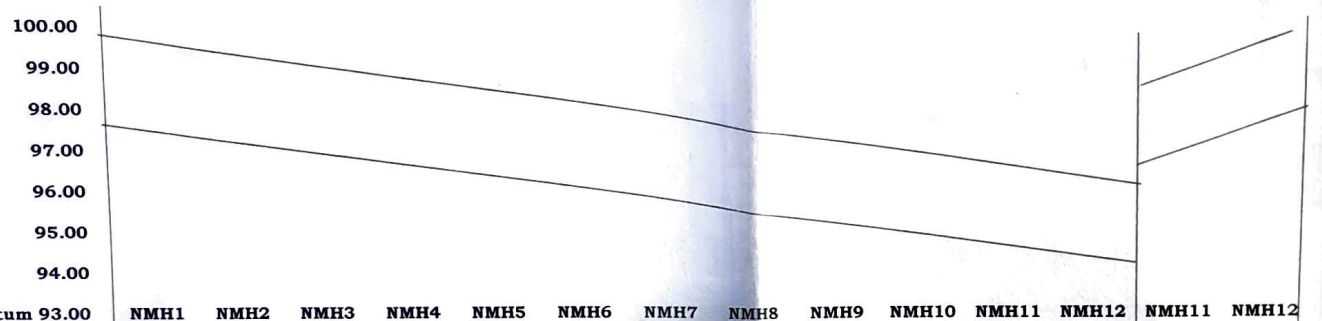

Datum 93.00	NMH1	NMH2	NMH3	NMH4	NMH5	NMH6	NMH7	NMH8	NMH9	NMH10	NMH11	NMH12	NMH11	NMH12
Ground Level (mt)	99.80	99.65	99.45	99.25	99.05	98.85	98.65	98.45	98.25	98.05	97.85	97.65	97.65	97.65
Invert Level (mt)	97.80	97.65	97.45	97.25	97.05	96.85	96.65	96.45	96.25	96.05	95.85	95.65	95.65	95.65
Depth (mt)	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Cummulative (mt)	0.00	30.00	60.00	90.00	120.00	150.00	180.00	210.00	240.00	270.00	300.00	330.00	0.00	360.00
Distance(mt)	0.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	0.00	30.00

Estimates for the work of providing and laying of 230mm dia Glazed stone ware sewer pipeline from 1st cross Rajiv Ngar to 1st D cross Kasturinagar near Goplan Apartment via 1st main Kasturi nagar coming under OMBR s/s of AEE E2-2 subdivision.

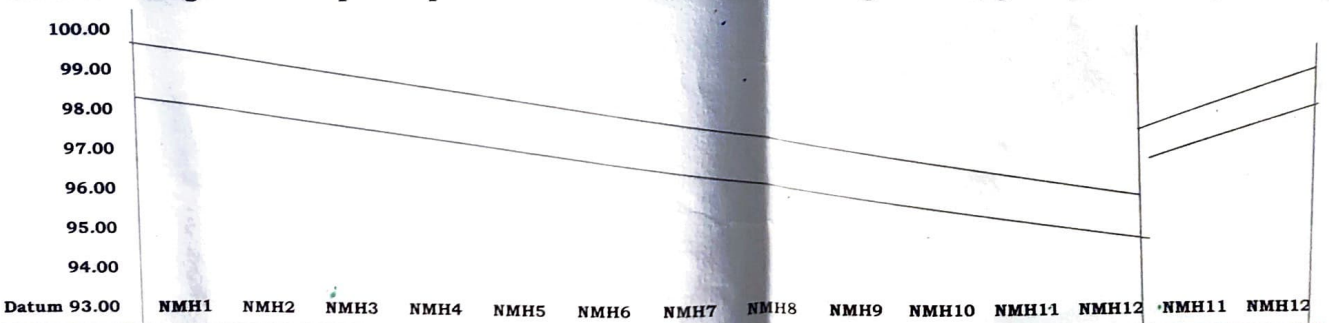

Datum 93.00	NMH1	NMH2	NMH3	NMH4	NMH5	NMH6	NMH7	NMH8	NMH9	NMH10	NMH11	NMH12	NMH11	NMH12
Ground Level (mt)	99.80	99.65	99.45	99.25	99.05	98.85	98.65	98.45	98.25	98.05	97.85	97.65	97.45	97.65
Invert Level (mt)	98.40	98.15	98.05	97.75	97.65	97.35	97.25	96.95	96.85	96.55	96.45	96.15	96.05	96.15
Depth (mt)	1.40	1.50	1.40	1.50	1.40	1.50	1.40	1.50	1.40	1.50	1.40	1.50	1.40	1.50
Cummulative (mt)	0.00	30.00	60.00	90.00	120.00	150.00	180.00	210.00	240.00	270.00	300.00	330.00	0.00	360.00
Distance(mt)	0.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	30.00	0.00	30.00

JE(OMBR)

AEE E22

EE E2